

## Screwdriver - SF-SL 0,6X3,5-200 - 1212550

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Screwdriver, slot-headed, size: 0.6 x 3.5 x 200 mm, 2-component grip, with non-slip grip

### Your advantages

- The tools feature ergonomic two-component safety handles
- Large contact surface of blades inside screw head

### Key Commercial Data

Packing unit	10 pc
GTIN	 4 046356 589857
GTIN	4046356589857
Weight per Piece (excluding packing)	45.400 g
Weight per piece (including packing)	48.900 g
Custom tariff number	82054000
Country of origin	Czech Republic

### Technical data

#### Dimensions

Length (b)	281 mm
Width (a)	26 mm
Blade thickness	0.6 mm
Blade width	3.5 mm
Blade height	200 mm
Wrench size	0 mm

#### General

Type	Bladed
	straight
Material	alloyed tool steel
Test standard	DIN/ISO 2380-1

#### Standards and Regulations

Test standard	DIN/ISO 2380-1
---------------	----------------

# Screwdriver - SF-SL 0,6X3,5-200 - 1212550


## Technical data

### Environmental Product Compliance

California Proposition 65	Further information on California's prop. 65 is available under "Downloads" in the manufacturer's declaration
---------------------------	---

## Drawings

Pictogram

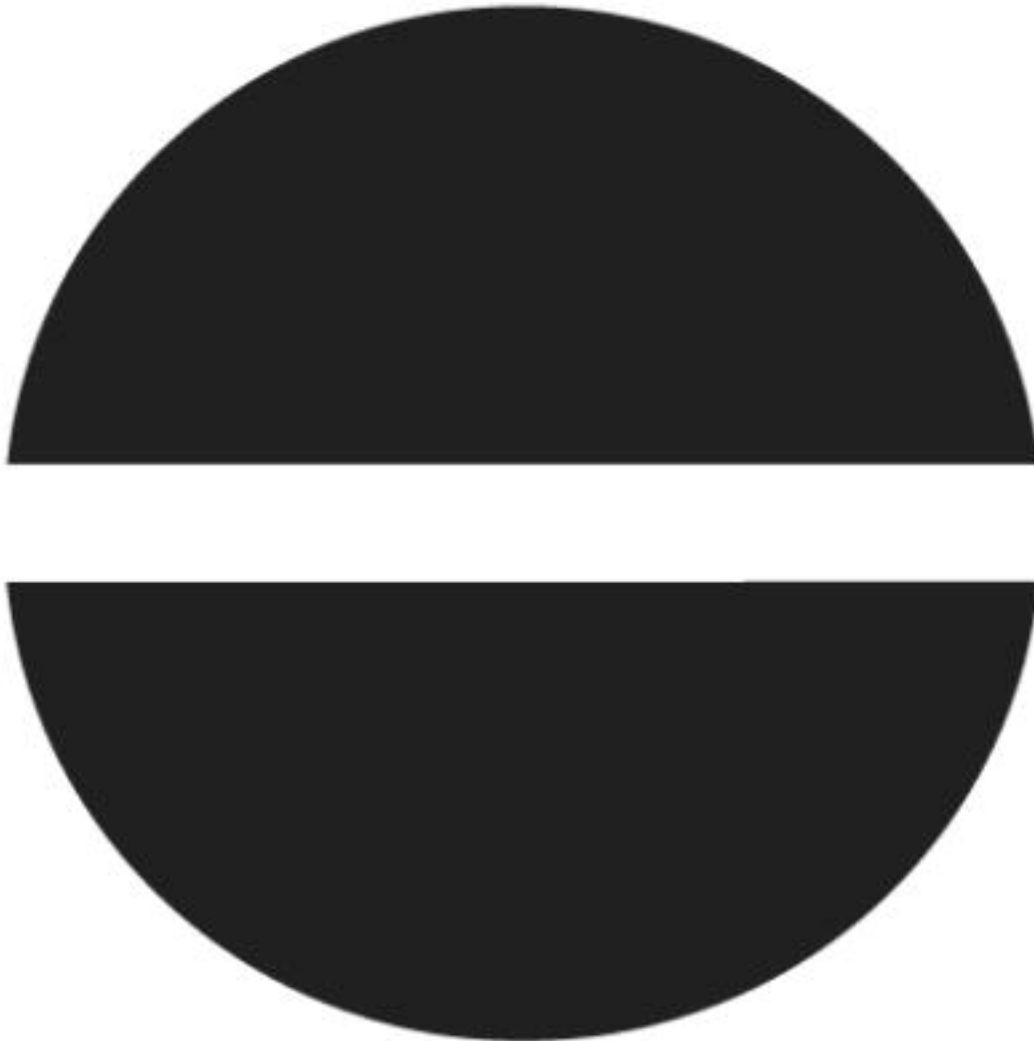

## Classifications

### eCl@ss

eCl@ss 10.0.1	21040407
eCl@ss 4.0	21040400
eCl@ss 4.1	21040400

# Screwdriver - SF-SL 0,6X3,5-200 - 1212550

## Classifications

### eCl@ss

eCl@ss 5.0	21040400
eCl@ss 5.1	21040400
eCl@ss 6.0	21040400
eCl@ss 7.0	21040407
eCl@ss 8.0	21040407
eCl@ss 9.0	21040407

### ETIM

ETIM 4.0	EC000158
ETIM 5.0	EC000158
ETIM 6.0	EC000158
ETIM 7.0	EC000158

### UNSPSC

UNSPSC 6.01	27112118
UNSPSC 7.0901	27111518
UNSPSC 11	23171604
UNSPSC 12.01	27111518
UNSPSC 13.2	27111701

## Approvals

### Approvals

---

Approvals


EAC

---

Ex Approvals

---

### Approval details

EAC		RU C- DE.AI30.B.01750
-----	---	--------------------------