

## Surge protection device - C-TV/HIFI - 2857002

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Attachment plug with surge protection for antenna inputs with TV connector

### Why buy this product

- Protective adapter for antenna connections
- TV or F connector
- Use on broadband cable or SAT connection

RoHS IP20

### Key Commercial Data

Packing unit	1 STK
GTIN	 4 017918 915186
GTIN	4017918915186
Weight per Piece (excluding packing)	53.500 g
Weight per piece (including packing)	73.700 g
Custom tariff number	85363010
Country of origin	Germany
Note	Made to Order (non-returnable)

### Technical data

#### Dimensions

Height	40 mm
Width	28 mm
Depth	61 mm

#### Ambient conditions

Ambient temperature (operation)	-25 °C ... 75 °C
Altitude	≤ 2000 m (amsl (above mean sea level))
Degree of protection	IP20

# Surge protection device - C-TV/HIFI - 2857002

## Technical data

### General

Housing material	PA 6.6
Flammability rating according to UL 94	V-0
Color	jet black RAL 9005
Overvoltage category	II
Degree of pollution	2
Mounting type	Connection-specific intermediate plugging
Type	Attachment plug
Number of positions	1
Direction of action	Line-Shield/Earth Ground

### Protective circuit

IEC test classification	C1
	C2
	C3
	D1
Maximum continuous voltage $U_C$	24 V DC
Rated current	1.5 A (25 °C)
Operating effective current $I_C$ at $U_C$	$\leq 1 \mu A$
Residual current $I_{PE}$	$\leq 1 \mu A$
Nominal discharge current $I_n$ (8/20) $\mu s$ (Core-Shield)	2.5 kA
Nominal pulse current $I_{an}$ (10/1000) $\mu s$ (Core-Shield)	120 A
Output voltage limitation at 1 kV/ $\mu s$ (Core-Shield) spike	$\leq 600 V$
Output voltage limitation at 1 kV/ $\mu s$ (Core-Shield) static	$\leq 600 V$
Residual voltage at $I_n$ (conductor-shield)	$\leq 30 V$
Voltage protection level $U_p$ (core-shield)	$\leq 700 V$ (C2 - 4 kV / 2 kA)
	$\leq 800 V$ (C2 - 5 kV/2.5 kA)
Response time $t_A$ (core-GND)	$\leq 100 ns$
Input attenuation $a_E$ , asym.	typ. 0.5 dB ( $\leq 2.4 GHz / 75 \Omega$ )
Cut-off frequency $f_g$ (3 dB), asym. (shield) in 75 Ohm system	$> 1 GHz$
Frequency range	4.7 MHz ... 860 MHz
Capacity asymmetrical (shield)	typ. 10 pF
Surge protection fault message	none
Impulse durability (conductor-shield)	C2 - 4 kV/2 kA
	C2 - 5 kV / 2.5 kA
	C3 - 100 A
	D1 - 500 A
Alternating current carrying capacity (conductor-shield)	5 A - 1 s
Pulse reset time (conductor-shield)	$< 3 s$

### Connection data

Connection method	PAL-TV (IEC 169-2)
-------------------	--------------------

# Surge protection device - C-TV/HIFI - 2857002

## Technical data

### Connection data


Connection method IN	Socket
Connection method OUT	Male

### Standards and Regulations


Standards/specifications	IEC 61643-21 2012
	EN 61643-21 2013
	EN 50083 CLASS-A

## Drawings

Dimensional drawing

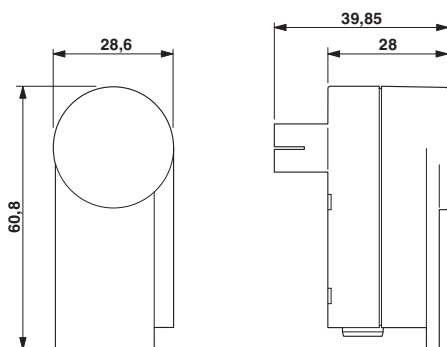

Circuit diagram

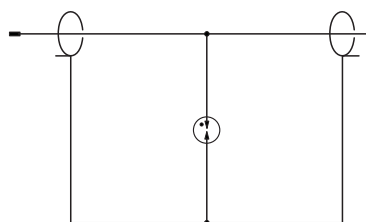

## Classifications

### eCl@ss

eCl@ss 4.0	27140201
eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130801
eCl@ss 6.0	27130810
eCl@ss 7.0	27130810
eCl@ss 8.0	27130807
eCl@ss 9.0	27130807

### ETIM

ETIM 2.0	EC001473
ETIM 3.0	EC001473
ETIM 4.0	EC000943
ETIM 5.0	EC000943
ETIM 6.0	EC000943

### UNSPSC

UNSPSC 6.01	30212010
-------------	----------

## Surge protection device - C-TV/HIFI - 2857002

### Classifications

#### UNSPSC

UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

### Approvals

#### Approvals

---

Approvals


EAC

---

Ex Approvals

---

#### Approval details

EAC		RU C- DE.A*30.B01561
-----	---	-------------------------

---