

Timer module - RIF-T3-24UC - 2902647


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Plug-in module for extending a relay module to create a timer relay, 3 time functions, 4 time ranges, for mounting on RIF-1, RIF-2, RIF-3, and RIF-4, input voltage: 24 V DC



Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 668880
GTIN	4046356668880
Weight per Piece (excluding packing)	16.560 g
Weight per piece (including packing)	16.900 g
Custom tariff number	85363010
Country of origin	Germany

Technical data

Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

Input data

Nominal input voltage U_N	24 V DC (AC operation only permitted for RIF-1)
Input voltage range in reference to U_N	0.4 ... 1.2
Mains frequency	50 Hz 60 Hz
Status display	Yellow LED
Protective circuit/component	Varistor
Surge voltage protection	> 56 V

Output data

Limiting continuous current	≤ 250 mA (Relay coil current)
Voltage drop at max. limiting continuous current	< 100 mV

Timer module - RIF-T3-24UC - 2902647

Technical data

General

Setting accuracy	3 % (of scale end value)
Repeat accuracy	1 %
Insulation	Basic insulation
Standards/regulations	DIN EN 50178
Overvoltage category	I
Degree of pollution	2
Mounting position	any
Assembly instructions	Can be inserted into relay base

Ambient conditions

Ambient temperature (operation)	-25 °C ... 50 °C (RIF-1, AC coil, 2 PDTs at 6 A)
	-25 °C ... 50 °C (RIF-1, DC coil, 2 PDTs at 5 A)
	-25 °C ... 40 °C (RIF-2, DC coil, 2 PDTs at 8 A)
	-25 °C ... 40 °C (RIF-2, DC coil, 4 PDTs at 5 A)
	-25 °C ... 40 °C (RIF-3, DC coil, 3 PDTs at 6.75 A)
	-25 °C ... 40 °C (RIF-3, DC coil, 2 PDTs at 8 A)
	-25 °C ... 35 °C (RIF-4, DC coil, 3 PDTs at 8 A)
	-25 °C ... 25 °C (RIF-4, DC coil, 3 N/O contacts at 8 A)
Ambient temperature (storage/transport)	-25 °C ... 85 °C

Dimensions

Width	13 mm
Height	12 mm
Depth	35 mm

Standards and Regulations

Connection in acc. with standard	CSA
Designation	Air clearances and creepage distances in a circuit
Standards/regulations	DIN EN 50178
Rated insulation voltage	50 V DC
Rated surge voltage	0.4 kV
Insulation	Basic insulation
Degree of pollution	2
Overvoltage category	I


Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings


Timer module - RIF-T3-24UC - 2902647

Diagram

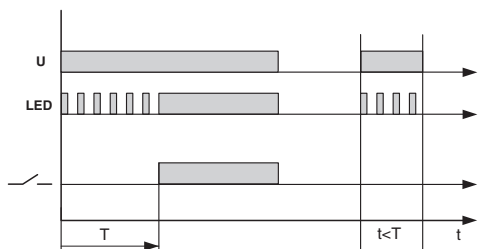


With switch-on delay

Diagram

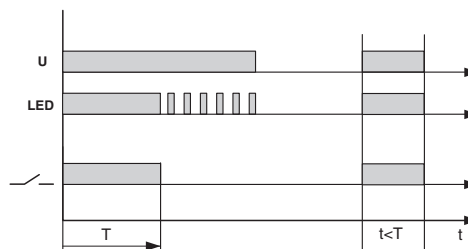


With passing make contact

Diagram

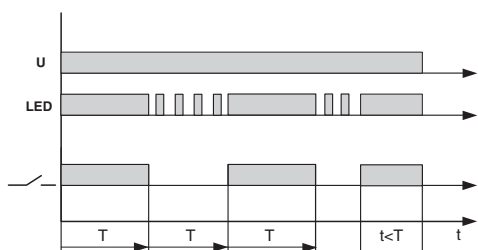

Flasher/pulse generator

Circuit diagram

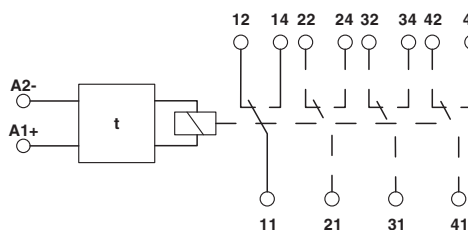

Classifications

eCl@ss

eCl@ss 5.0	27371692
eCl@ss 5.1	27371692
eCl@ss 6.0	27379208
eCl@ss 7.0	27379208
eCl@ss 8.0	27379208
eCl@ss 9.0	27371692

ETIM

ETIM 4.0	EC002586
ETIM 5.0	EC002586
ETIM 6.0	EC002586

UNSPSC

UNSPSC 6.01	30211917
UNSPSC 7.0901	39121516
UNSPSC 11	39121516

Timer module - RIF-T3-24UC - 2902647

Classifications

UNSPSC

UNSPSC 12.01	39121516
UNSPSC 13.2	39121516

Approvals

Approvals

Approvals

UL Recognized / CSA / EAC / LR / EAC / PRS / DNV GL

Ex Approvals

Approval details

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 113228
CSA		http://www.csagroup.org/services-industries/product-listing/	2607057
EAC			EAC-Zulassung
LR		http://www.lr.org/en	15/20011
EAC			RU C- DE.A*30.B.01082
PRS		http://www.prs.pl/	TE/2108/880590/16
DNV GL		http://exchange.dnv.com/tari/	TAA000018V

