


SIMATIC DP, ET200 PRO Fail-safe electronic module 8/16 F-DI 24 V DC PROFIsafe, 90 mm overall width, up to Category 4 (EN 954-1)/ SIL3 (IEC61508)/PLE (ISO13849)

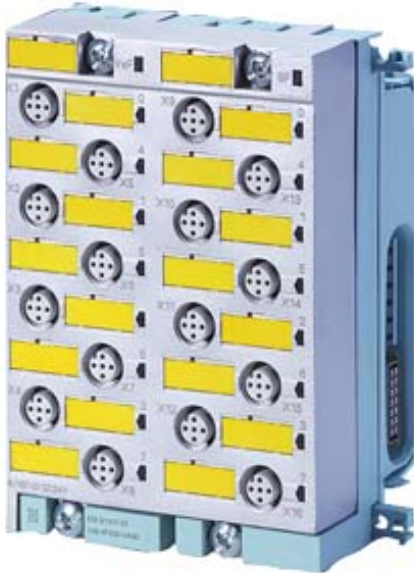

Supply voltage	
Rated value (DC)	24 V
Reverse polarity protection	Yes
Power loss	
Power loss, typ.	4.5 W
Digital inputs	
Number of digital inputs	16
Input current	
<ul style="list-style-type: none"> <li>for signal "1", typ.</li> </ul>	3.7 mA
Standards, approvals, certificates	
Highest safety class achievable in safety mode	
<ul style="list-style-type: none"> <li>Performance level according to ISO 13849-1</li> </ul>	e
<ul style="list-style-type: none"> <li>SIL acc. to IEC 61508</li> </ul>	3
Dimensions	
Width	90 mm
Height	130 mm
Depth	65 mm

last modified:

06/09/2020