


SCALANCE XR324-12M; managed IE switch, 19" rack; 12x 100/1000 Mbit/s 2-port media modules, electrical or optical; LED diagnostics; error signaling Contact; Select/set pushbutton, PROFINET IO device, network management, Integrated redundancy manager, office features (RSTP, VLAN, IGMP,..) C-plug in scope of delivery; Power supply 24 V DC; Ports at the back

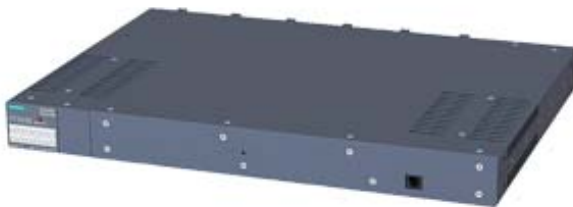

<b>Product type designation</b>	<b>SCALANCE XR324-12M</b>
<b>Transfer rate</b>	
Transfer rate	10 Mbit/s, 100 Mbit/s, 1000 Mbit/s
<b>Interfaces / for communication / Integrated</b>	
Number of 100 Mbit/s ST(BFOC) ports	
• for multimode	24
Number of 100 Mbit/s SC ports	
• for multimode	24
Number of 1000 Mbit/s LC ports	
• for multimode	24
• for single mode (LD)	24
<b>Interfaces / other</b>	
Number of electrical connections	
• for operator console	1
• for signaling contact	1
• for media module	12
• for power supply	1
• for redundant voltage supply	1

Type of electrical connection	RJ11 2-pole terminal block 4-pole terminal block
design of the removable storage	Yes

### Signal inputs/outputs

Operating voltage / of the signaling contacts	24 V
Operating current / of the signaling contacts	0.1 A

### Supply voltage, current consumption, power loss

Type of voltage supply / redundant power supply unit	No
Type of voltage / of the supply voltage	DC
Supply voltage	24 V
external / minimum	19.2 V
external / maximum	28.8 V
Product component / fusing at power supply input	Yes
Fuse protection type / at input for supply voltage	F 5 A / 125 V
Consumed current / maximum	1.8 A
Power loss [W]	44 W

### Ambient conditions

Ambient temperature	-40 ... +70 °C
during operation	-40 ... +85 °C
during storage	-40 ... +85 °C
during transport	Reduced operating temperature through the use of media modules (-40 °C to +70 °C) or SFP plug-in transceivers (-40 °C to +60 °C). If the device is installed in the vertical position, the maximum operating temperature is reduced to +50 °C.
Note	
Relative humidity	95 %
at 25 °C / without condensation / during operation / maximum	
Protection class IP	IP20

### Design, dimensions and weights

Design	19" rack
Number of modular height units / relating to 19-inch cabinet	1
Width	483 mm
Height	44 mm

Depth	305 mm
Net weight	5.5 kg
Product feature / conformal coating	No
Mounting type	When used in shipbuilding, the device must be secured in the 19" rack at four points
<ul style="list-style-type: none"> <li>• 19-inch installation</li> <li>• 35 mm DIN rail mounting</li> <li>• wall mounting</li> <li>• S7-300 rail mounting</li> <li>• S7-1500 rail mounting</li> </ul>	Yes No No No No

### Product features, product functions, product components / general

Cascading in the case of a redundant ring / at reconfiguration time of <math>\leq 0.3\text{ s}</math>	100
Cascading in cases of star topology	any (depending only on signal propagation time)

### Product functions / management, configuration, engineering

Product function	
<ul style="list-style-type: none"> <li>• CLI</li> <li>• web-based management</li> <li>• MIB support</li> <li>• TRAPs via email</li> <li>• Configuration with STEP 7</li> <li>• RMON</li> <li>• Port mirroring</li> <li>• multiport mirroring</li> <li>• CoS</li> <li>• PROFINET IO diagnosis</li> </ul>	Yes Yes Yes Yes Yes Yes Yes Yes Yes Yes
PROFINET conformity class	B
Product function / switch-managed	Yes
Protocol / is supported	
<ul style="list-style-type: none"> <li>• Telnet</li> <li>• HTTP</li> <li>• HTTPS</li> <li>• TFTP</li> <li>• FTP</li> <li>• BOOTP</li> <li>• GMRP</li> <li>• DCP</li> <li>• LLDP</li> <li>• SNMP v1</li> <li>• SNMP v2</li> <li>• SNMP v3</li> </ul>	Yes Yes Yes Yes Yes Yes Yes Yes Yes Yes Yes Yes

<ul style="list-style-type: none"> <li>• IGMP (snooping/querier)</li> </ul>	Yes
Identification & maintenance function	
<ul style="list-style-type: none"> <li>• I&amp;M0 - device-specific information</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• I&amp;M1 – higher-level designation/location designation</li> </ul>	Yes

### Product functions / Diagnostics

Product function	
<ul style="list-style-type: none"> <li>• Port diagnostics</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• Statistics Packet Size</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• Statistics packet type</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• Error statistics</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• SysLog</li> </ul>	Yes

### Product functions / VLAN

Product function	
<ul style="list-style-type: none"> <li>• VLAN - port based</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• VLAN - protocol-based</li> </ul>	No
<ul style="list-style-type: none"> <li>• VLAN - IP-based</li> </ul>	No
<ul style="list-style-type: none"> <li>• VLAN dynamic</li> </ul>	Yes
Number of VLANs / maximum	255
Number of VLANs - dynamic / maximum	255
Protocol / is supported / GVRP	Yes

### Product functions / DHCP

Product function	
<ul style="list-style-type: none"> <li>• DHCP client</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• DHCP Option 82</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• DHCP Option 66</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• DHCP Option 67</li> </ul>	Yes

### Product functions / redundancy

Product function	
<ul style="list-style-type: none"> <li>• Ring redundancy</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• High Speed Redundancy Protocol (HRP)</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• high speed redundancy protocol (HRP) with redundancy manager</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• high speed redundancy protocol (HRP) with standby redundancy</li> </ul>	Yes
Protocol / is supported / Media Redundancy Protocol (MRP)	Yes
Product function	
<ul style="list-style-type: none"> <li>• media redundancy protocol (MRP) with redundancy manager</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• redundancy procedure STP</li> </ul>	Yes

<ul style="list-style-type: none"> <li>• redundancy procedure RSTP</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• redundancy procedure MSTP</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• Parallel Redundancy Protocol (PRP)/operation in the PRP-network</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• Parallel Redundancy Protocol (PRP)/Redundant Network Access (RNA)</li> </ul>	No
<ul style="list-style-type: none"> <li>• Passive listening</li> </ul>	Yes
Protocol / is supported	
<ul style="list-style-type: none"> <li>• STP/RSTP</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• STP</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• RSTP</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• MSTP</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• RSTP big network support</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• LACP</li> </ul>	Yes

### Product functions / Security

Product function	
<ul style="list-style-type: none"> <li>• ACL - MAC-based</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• ACL - port/MAC-based</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• IEEE 802.1x (radius)</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• Broadcast/Multicast/Unicast Limiter</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• broadcast blocking</li> </ul>	Yes
Protocol / is supported	
<ul style="list-style-type: none"> <li>• SSH</li> </ul>	Yes

### Product functions / time

Product function	
<ul style="list-style-type: none"> <li>• SICLOCK support</li> </ul>	Yes
Protocol / is supported	
<ul style="list-style-type: none"> <li>• NTP</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• SNTP</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• IEEE 1588 profile default</li> </ul>	Yes

### Standards, specifications, approvals

Standard	
<ul style="list-style-type: none"> <li>• for FM</li> </ul>	FM3611: Class 1, Divison 2, Group A, B, C, D / T4, Class 1, Zone 2, Group IIC, T4
<ul style="list-style-type: none"> <li>• for hazardous zone</li> </ul>	EN 60079-0 : 2006, EN 60079-15: 2005, II 3 G Ex nA II T4 KEMA 07 ATEX 0145X
<ul style="list-style-type: none"> <li>• for safety / from CSA and UL</li> </ul>	UL 60950-1, CSA C22.2 No. 60950-1-03
<ul style="list-style-type: none"> <li>• for hazardous zone / from CSA and UL</li> </ul>	UL 1604 and UL 2279-15 (Hazardous Location), CSA C22.2 No. 213-M1987, Class 1 / Division 2 / Group A, B, C, D / T4, Class 1 / Zone 2 / Group IIC / T4
<ul style="list-style-type: none"> <li>• for emitted interference</li> </ul>	EN 61000-6-4:2007 (Class A)
<ul style="list-style-type: none"> <li>• for interference immunity</li> </ul>	EN 61000-6-2:2005

MTBF	25 y
<b>Standards, specifications, approvals / CE</b>	
Certificate of suitability / CE marking	Yes
<b>Standards, specifications, approvals / other</b>	
Certificate of suitability	EN 61000-6-2:2005, EN 61000-6-4:2007
<ul style="list-style-type: none"> <li>• C-Tick</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• Railway application in accordance with EN 50155</li> </ul>	No
<ul style="list-style-type: none"> <li>• KC approval</li> </ul>	Yes
<b>Standards, specifications, approvals / marine classification</b>	
Marine classification association	
<ul style="list-style-type: none"> <li>• Bureau Veritas (BV)</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• Korean Register of Shipping (KRS)</li> </ul>	Yes
<b>Further information / Internet-Links</b>	
Internet-Link	
<ul style="list-style-type: none"> <li>• to website: Selector SIMATIC NET SELECTION TOOL</li> </ul>	<a href="http://www.siemens.com/snst">http://www.siemens.com/snst</a>
<ul style="list-style-type: none"> <li>• to website: Industrial communication</li> </ul>	<a href="http://www.siemens.com/simatic-net">http://www.siemens.com/simatic-net</a>
<ul style="list-style-type: none"> <li>• to website: Industry Mall</li> </ul>	<a href="https://mall.industry.siemens.com">https://mall.industry.siemens.com</a>
<ul style="list-style-type: none"> <li>• to website: Information and Download Center</li> </ul>	<a href="http://www.siemens.com/industry/infocenter">http://www.siemens.com/industry/infocenter</a>
<ul style="list-style-type: none"> <li>• to website: Image database</li> </ul>	<a href="http://automation.siemens.com/bilddb">http://automation.siemens.com/bilddb</a>
<ul style="list-style-type: none"> <li>• to website: CAx Download Manager</li> </ul>	<a href="http://www.siemens.com/cax">http://www.siemens.com/cax</a>
<ul style="list-style-type: none"> <li>• to website: Industry Online Support</li> </ul>	<a href="https://support.industry.siemens.com">https://support.industry.siemens.com</a>
<b>Security information</b>	
Security information	<p>Siemens provides products and solutions with industrial security functions that support the secure operation of plants, solutions, machines, equipment and/or networks. They are important components in a holistic industrial security concept. With this in mind, Siemens' products and solutions undergo continuous development. Siemens recommends strongly that you regularly check for product updates. For the secure operation of Siemens products and solutions, it is necessary to take suitable preventive action (e.g. cell protection concept) and integrate each component into a holistic, state-of-the-art industrial security concept. Third-party products that may be in use should also be considered. For more information about industrial security, visit <a href="http://www.siemens.com/industrialsecurity">http://www.siemens.com/industrialsecurity</a>. To stay informed about product updates as they occur, sign up for a product-specific newsletter. For more information, visit <a href="http://support.automation.siemens.com">http://support.automation.siemens.com</a>. (V3.4)</p>
<b>last modified:</b>	05/13/2020